

Einsteckbuchsen

höhenverstellbar, Kunststoff Thermoplast

MATERIAL

Kunststoff Thermoplast (Polyamid PA), schwarz, matt


FUNKTIONEN UND ANWENDUNGEN

Einsteckbuchsen für Vierkantrohre höhenverstellbar


Die Montage erfolgt einfach durch die Positionierung der Einsteckbuchse im Rohr, ohne dass Schrauben oder andere Befestigungselemente benötigt werden.



NDA.Q-20 ÷ NDA.Q-25

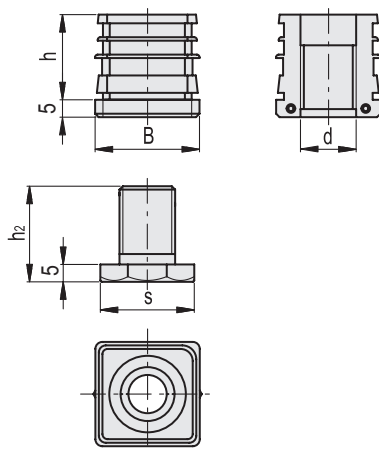

NDA.Q-30 ÷ NDA.Q-50

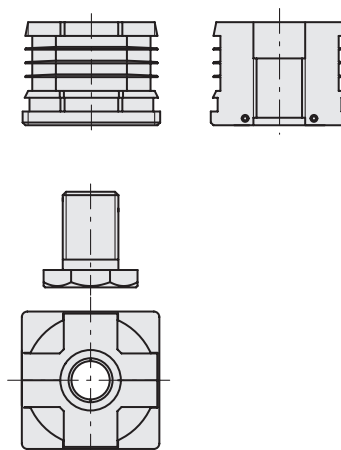

Die Geometrie der Endkappe in dem in das Rohr eingesetzten Teil kann für die verschiedenen Abmessungen variieren.

Code	Artikelnummer	B	d	h	h2	s	Rohr außenr	Rohr innen	Stärke min-max	Max. stati- sche Last* [N]	
430401	NDA.Q-20-M12x30	20	M12	34	32	SW19	20	17-16	1.5-2	1000	9
430406	NDA.Q-22-M12x30	22	M12	34	32	SW19	22	19-18	1.5-2	1000	11
430411	NDA.Q-25-M12x30	25	M12	34	32	SW19	25	22-21	1.5-2	1000	14
430416	NDA.Q-25-M16x30	25	M16	34	37	SW27	25	22-21	1.5-2	1500	15
430421	NDA.Q-30-M16x30	30	M16	25	37	SW27	30	27-26	1.5-2	1500	20
430426	NDA.Q-30-M22x30	30	M22	26	35	SW27	30	27-26	1.5-2	2500	16
430431	NDA.Q-35-M22x30	35	M22	34	35	SW27	35	32-31	1.5-2	2500	21
430436	NDA.Q-40-M22x30	40	M22	33	35	SW27	40	37-36	1.5-2	2500	30
430441	NDA.Q-45-M22x30	45	M22	34	35	SW27	45	42-41	1.5-2	2500	34
430446	NDA.Q-50-M22x30	50	M22	34	35	SW27	50	48-47	1-1.5	2500	42

* The value refers to laboratory tests carried out with a load applied vertically to the leveling element unscrewed from the end-cap of 10 mm and leaning on a flat surface. The max limit static load is the value above which the load applied to the element may cause some plastic material breakage, under particular conditions of use. Obviously, a factor that takes into consideration the importance and the safety level of the specific application must be applied to this value.

